




## Fixture Tap

### Provides connection to luminaires

Compact low-profile device for quick connection to fixtures. Snap-in 1/2" trade knockout design can be field or factory installed.

### Specifications

- Connectors are integrally moulded for superior strength and reliability.
- Mating connectors are self-latching and shrouded for added safety and protection.
- Uniquely-keyed, colour-coded mating connectors ensure safe, simple and error-free connectivity.
- Robust terminals deliver excellent electrical performance.
- Manufactured with Eco-Friendly Halogen-free RoHS-compliant materials.
- CSA 22.2 No 203.1 certified Manufactured Wiring System
- Approved for luminaire disconnect per CEC Part 1 30-308(4)
- Acceptable for use in environmental air handling spaces in accordance with CEC Part 1 12-010(3).
- Constructed with 8" 18AWG Fixture Leads prepared for connection.

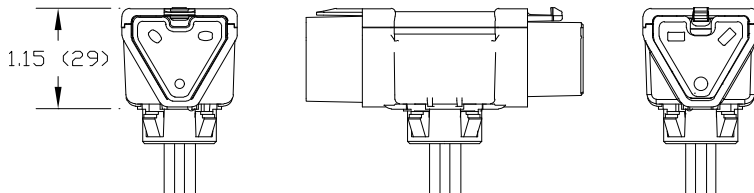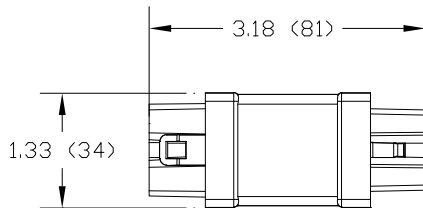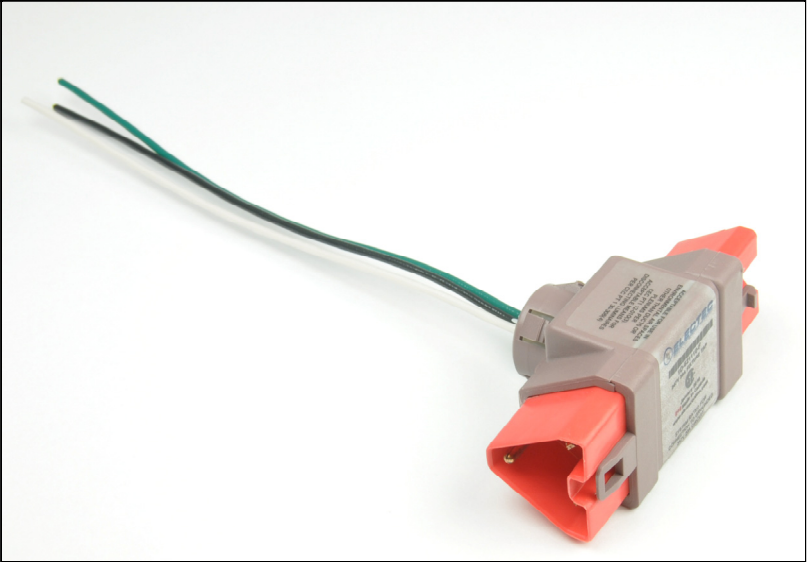

LSZH  
Halogen Free

RoHS  
Compliant



### Notes

4. Dimensions are in inches (millimetres)
5. 347V 20A keyed-orientation is shown
6. Other system ratings and applications are available in uniquely-keyed and colour-coded configurations.
7. 18AWG Fixture Leads standard

### Ordering Information

Catalogue No.	1 D – <b>VC</b> – <b>LNGO</b> – F <b>IP</b>	
<b>VC</b> System	<b>21</b> = 125/250V 15A, <b>22</b> = 125/250V 20A, <b>42</b> = 277V 20A, <b>62</b> = 347V 20A	
<b>LNGO</b> Application:	<b>1110</b> = Single Circuit, <b>2110</b> = Dual/Split Circuit	
<b>T</b> Fixture Leads:	<b>0</b> = 18AWG, <b>1</b> = 16AWG, <b>2</b> = 14AWG, <b>3</b> = 12AWG	
<b>P</b> Options:	<b>0</b> = none, <b>1</b> = Push-in style connector	

### Example

1D-62-1110-F01

**Single Circuit 347V 20A  
Fixture Tap (L,N,G)  
c/w 18AWG fixture leads  
and push-in style  
connectors**