

Drop Assemblies

Modular drop assemblies for outlets and switches


Pre-wired drop assemblies deliver cost-effective installation of outlets and switches.

Specifications

- Constructed using ULTRALX® MC/AC-90 cable, minimum 12AWG conductors rated 600V 20A.
- Connectors are integrally moulded for superior strength and reliability.
- Mating connectors are self-latching and shrouded for added safety and protection.
- Uniquely-keyed, colour-coded mating connectors ensure safe, simple and error-free connectivity.
- Robust terminals deliver excellent electrical performance.
- Manufactured with Eco-Friendly Halogen-free RoHS-compliant materials.
- CSA 22.2 No 203.1 certified Manufactured Wiring System.
- Approved for luminaire disconnect per CEC Part 1 30-308(4)
- Acceptable for use in environmental air handling spaces in accordance with CEC Part 1 12-010(3)
- Constructed with UL and/or CSA approved metal boxes.

Notes

1. Multi-gang, dual/split circuit assemblies available.
2. Devices are commercial spec-grade as per design specification.
3. Includes drywall mounting bracket.

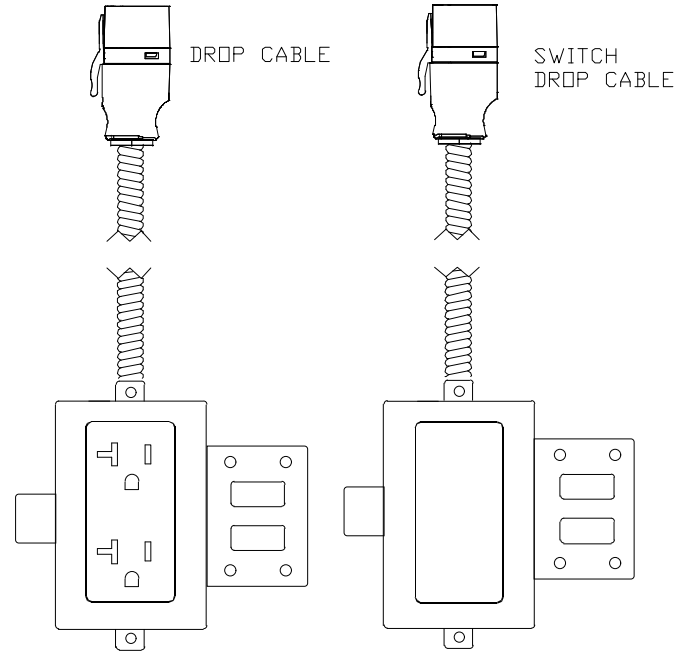

Ordering Information

Catalogue No.	1 D – VC – LNGO – Z B3104D III A	
VC System	21 = 125V 15A Receptacle, 22 = 125V 15/20A Receptacle or 20A Switch 42 = 277V 20A Switch, 62 = 347V 20A Switch	
LNGO Application	1110 = Single Circuit, 2110 = Dual/Split Circuit 1120 = Isolated Ground 1011 = Switch, 1012 = 3, 4-Way Switch	
Z # of Duplexes	blank = One, 2 = Two	
III Length in dm	003 = 0.3m (1'), 027 = 2.7m (9'), 046 = 4.6m (15'), 064 = 6.4m (21')	
A Cable Type	A = Standard MC/AC90 Cable, H = Halogen Free MC/AC90	

Example

1D-62-1011-B3104D064H

347V 20A Switch (L, R, G) Drop Assembly 6.4m Constructed with Halogen Free Type MC/AC90 Cable

1D-22-1110-B3104D046A

125V 15/20A Single Circuit (L, N, G) Outlet Drop Assembly 4.6m