

Main Distribution Box Enclosure

Delivers Main Distribution Point for EZ-Wiring MWS

Pre-wired enclosure provides cost-effective installation of modular wiring system distribution centers.


Specifications

- Constructed using ULTRALX® MC/AC-90 cable, minimum 12AWG conductors rated 600V 20A.
- Connectors are integrally moulded for superior strength and reliability.
- Mating connectors are self-latching and shrouded for added safety and protection.
- Uniquely-keyed, colour-coded mating connectors ensure safe, simple and error-free connectivity.
- Robust terminals deliver excellent electrical performance.
- Manufactured with Eco-Friendly Halogen-free RoHS-compliant materials.
- CSA 22.2 No 203.1 certified Manufactured Wiring System.
- Approved for luminaire disconnect per CEC Part 1 30-308(4).
- Acceptable for use in environmental air handling spaces in accordance with CEC Part 1 12-010(3).
- Constructed using UL and/or CSA approved metal enclosures.

Notes

1. Standard enclosure dimensions are 8"x8"x4". Other enclosure sizes and styles are available.
2. Suitable for power distribution and lighting applications up to 600V 20A.
3. Delivers one or two 3-Phase 4-Wire systems as required.
4. Intended for field connection as per application spec.
5. Allows for maximum on-site flexibility for building connection requirements.

* Denotes optional Dual/Split Circuit. Isolated Ground version available.

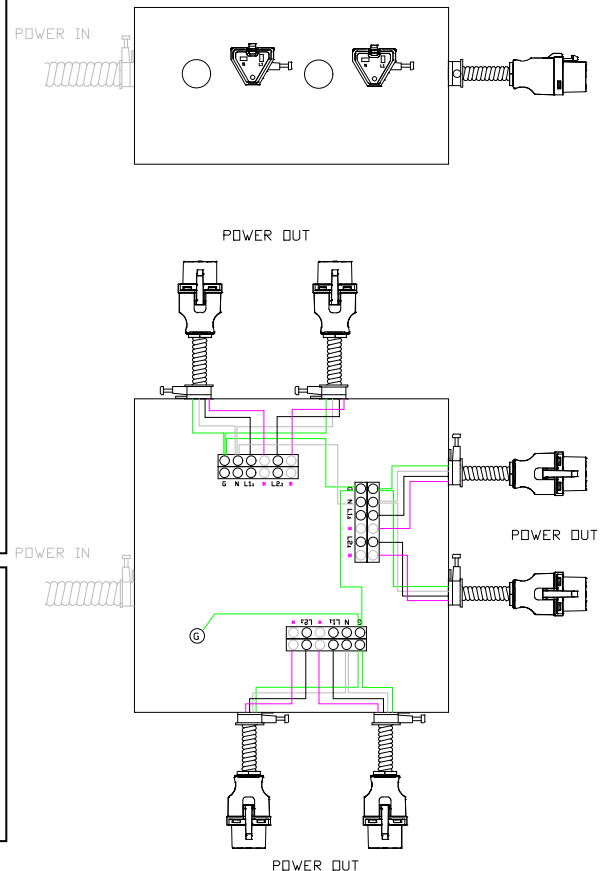

Ordering Information

Catalogue No. 1 D – **VC** – **LNGO** – B0808046C **A**

VC System **21** = 125/250V 15A, **22** = 125/250V 20A,
42 = 277/480V 20A, **62** = 347/600V 20A

LNGO Application **1110** = Single Circuit, **2110** = Dual/Split Circuit, **1120** = Isolated Ground

A Cable Type **A** = Standard MC/AC90 Cable, **H** = Halogen Free MC/AC90 Cable