


## Extender Cable

**Provides interconnection anywhere within the MWS**

Female and Male EZ-Wiring connectors deliver safe and intuitive connections.

### Specifications

- Constructed using ULTRALX® MC/AC-90 cable, minimum 12AWG conductors rated 600V 20A.
- Connectors are integrally moulded for superior strength and reliability.
- Mating connectors are self-latching and shrouded for added safety and protection.
- Uniquely-keyed, colour-coded mating connectors ensure safe, simple and error-free connectivity.
- Robust terminals deliver excellent electrical performance.
- Manufactured with Eco-Friendly Halogen-free RoHS-compliant materials.
- CSA 22.2 No 203.1 certified Manufactured Wiring System.
- Approved for luminaire disconnect per CEC Part 1 30-308(4).
- Acceptable for use in environmental air handling spaces in accordance with CEC Part 1 12-010(3).

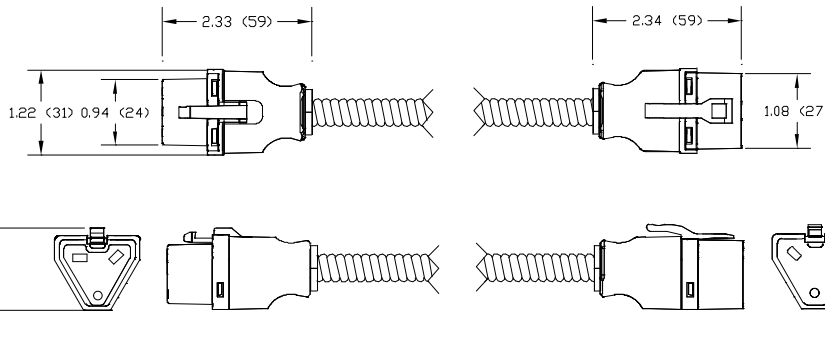

LSZH  
Halogen Free

RoHS  
Compliant



### Notes

1. Dimensions are in inches (millimetres)
2. 347V 20A keyed-orientation is shown
3. Other system ratings and applications are available in uniquely-keyed and colour-coded configurations.

### Ordering Information

<b>Catalogue No.</b>	1 D – <b>VC</b> – <b>LNGO</b> – E <b>III A</b>	
<b>VC</b> System	<b>21</b> = 125/250V 15A, <b>22</b> = 125/250V 20A, <b>42</b> = 277V 20A, <b>62</b> = 347V 20A	
<b>LNGO</b> Application	<b>1110</b> = Single Circuit, <b>2110</b> = Dual/Split Circuit, <b>1120</b> = Isolated Ground, <b>1011</b> = Switch, <b>1012</b> = 3, 4-Way Switch	
<b>III</b> Length in dm	<b>027</b> = 2.7m (9'), <b>034</b> = 3.4m (11'), <b>040</b> = 4.0m (13'), <b>046</b> = 4.6m (15'), <b>064</b> = 6.4m (21')	
<b>A</b> Cable Type	<b>A</b> = Standard MC/AC90 Cable <b>H</b> = Halogen Free MC/AC90 Cable	

### Example

1D-62-1110-E027H

**Single Circuit 347V 20A  
Extender Cable (L,N,G)  
2.7m  
Constructed with  
Halogen-Free Type  
MC/AC-90 Cable**