

Starter Cord


Provides power supply connection and interface between conventional hardwiring and EZ-Wiring® components. Free end has prepared wires & snap-in connector for field connection to power supply. Load end has a female EZ-Wiring® connector.

Features and Benefits:

- ELECTEC EZ-Wiring® components are UL Listed to be in compliance with UL 183 – Manufactured Wiring Systems (QQVX) and CSA Certified to be in compliance with CSA 22.2 No. 203-1 - Manufactured Wiring Systems.
- Robust terminal design exceeds 470Amp for 4 seconds.
- EZ-Wiring® connectors are integrally moulded (fully encapsulated) utilizing high impact Halogen-free, Eco-Friendly, Low Smoke, UL94-V0 rated, Oxygen Index – 33%, RoHS-compliant polymers for superior strength, reliability and safety.
- Dielectric Withstand 3000Vac.
- Mating connectors are self-latching and shrouded for added protection.
- Uniquely keyed and colour-coded to clearly indicate ratings and provide safe, simple, error-free connectivity. Only connectors having identical colours can plug together properly.
- Approved “Ballast Disconnect Means” per NEC 410.73(g) and CEC Part 1 30-308(4).
- Acceptable for interrupting current (make or break) under full load.



Ultra-Compact, multiple applications
Consult EZ-Wiring® Configuration Matrix

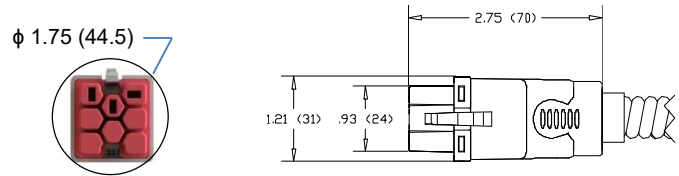

Ordering Information

Catalogue No.;

1H – VC – LNGO – C III W XYZ

1H	__	__	C	__	__	__
----	----	----	---	----	----	----

VC System **22** = 125/250V 20A, **2D** = 125/250V 20A + Control,
42 = 277/480V 20A, **4D** = 277/480V 20A + Control,
62 = 347/600V 20A, **6D** = 347/600V 20A + Control

LNGO Application **Power Distribution** **DALI/Class 1 (Control Wiring)**

3w	1110 = (L,N,G)	
3w	2010 = (2L,G)	
4w	2110 = (2L,N,G)	
5w	3110 = (3L,N,G)	1112 = 1 circuit + control (L,N,G,2C)

III Cord Length (in cm) **030** = 12in(30cm), **046** = 18in(46cm), **061** = 24in(61cm), **076** = 30in(76cm), **091** = 36in(91cm),
122 = 4ft(1.2m), **183** = 6ft(1.8m), **244** = 8ft(2.4m), **305** = 10ft(3.1m), **366** = 12ft(3.7m)

W Gauge **2** = #12AWG (20A), **4** = #14AWG (15A), **6** = #16AWG (10A), **8** = #18AWG (7A)

XYZ (X) Cord Type **J** = SJ (300V), **S** = S (600V)
(Y) Cord Colour **K** = Black, **W** = White
(Z) Other Options **C** = Cord connector, **A** = Quick-connector style “A”, **M** = Quick-connector style “M”,
W = Wire connector, **blank** = none

Adhere to all Code requirements and carefully follow installation instructions

