

Taps

Interface with Drop Assemblies to complete outlet and switch drop installation.


Pre-wired modular junction box enables cost-effective drop installations.

Specifications

- Constructed using ULTRALX® MC/AC-90 cable, minimum 12AWG conductors rated 600V 20A.
- Connectors are integrally moulded for superior strength and reliability.
- Mating connectors are self-latching and shrouded for added safety and protection.
- Uniquely-keyed, colour-coded mating connectors ensure safe, simple and error-free connectivity.
- Robust terminals deliver excellent electrical performance.
- Manufactured with Eco-Friendly Halogen-free RoHS-compliant materials.
- CSA 22.2 No 203.1 certified Manufactured Wiring System.
- Approved for luminaire disconnect per CEC Part 1 30-308(4).
- Acceptable for use in environmental air handling spaces in accordance with CEC Part 1 12-010(3).
- Constructed using UL and/or CSA approved metal enclosures.

Notes

1. Typical junction box dimension 4" x 2 1/8".
2. Includes mounting bracket.

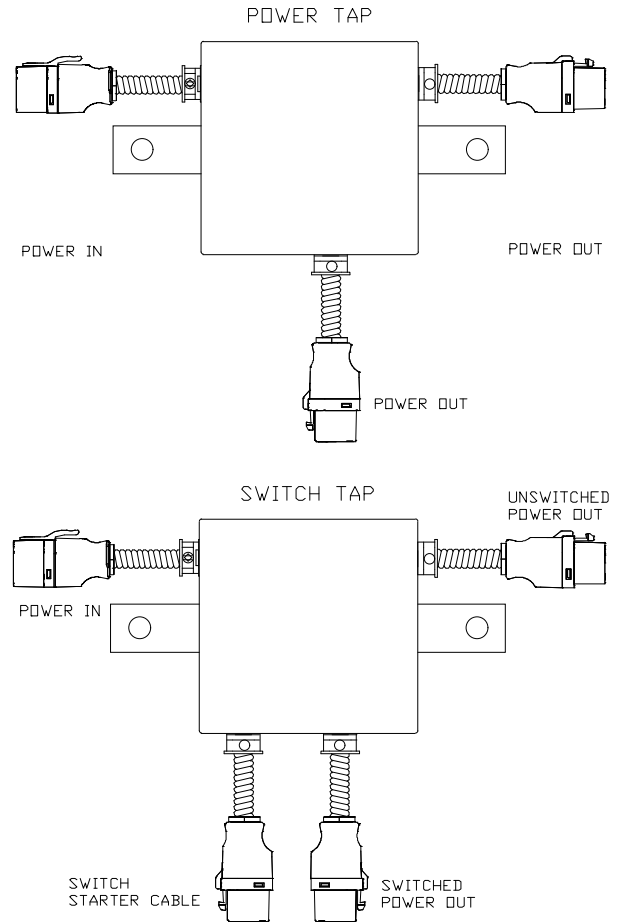

Ordering Information

Catalogue No.	1 D – VC – LNGO – B52171 S A	
VC System	21 = 125/250V 15A, 22 = 125/250V 20A,	
	42 = 277V 20A, 62 = 347V 20A	
LNGO Application	1110 = Single Circuit, 2110 = Dual/Split Circuit	
	1120 = Isolated Ground	
	1011 = Switch, 1012 = 3, 4-Way Switch	
S Style	I = Power Tap, S = Switch Tap	
A Cable Type	A = Standard MC/AC90 Cable	
	H = Halogen Free MC/AC90 Cable	

Example

1D-62-1011- B52171SH

347V 20A Switch Tap (L,G,R) Constructed with Halogen Free Type MC/AC-90 Cable

1D-22-1110- B52171TH

125V 20A Single Circuit Tap (L, N, G) Constructed with Halogen Free Type MC/AC90 Cable