


Extender Cable

Provides interconnection anywhere within the MWS

Female and Male EZ-Wiring connectors deliver safe and intuitive connections.

Specifications

- Constructed using ULTRALX® MC/AC-90 cable, minimum 12AWG conductors rated 600V 20A.
- Connectors are integrally moulded for superior strength and reliability.
- Mating connectors are self-latching and shrouded for added safety and protection.
- Uniquely-keyed, colour-coded mating connectors ensure safe, simple and error-free connectivity.
- Robust terminals deliver excellent electrical performance.
- Manufactured with Eco-Friendly Halogen-free RoHS-compliant materials.
- UL 183 and CSA 22.2 No 203.1 certified Manufactured Wiring System
- Approved for luminaire disconnect per NEC 410.73(g) and CEC Part 1 30-308(4)
- Acceptable for use in environmental air handling spaces per NEC 300-22(c) and CEC Part 1 12-010(3)

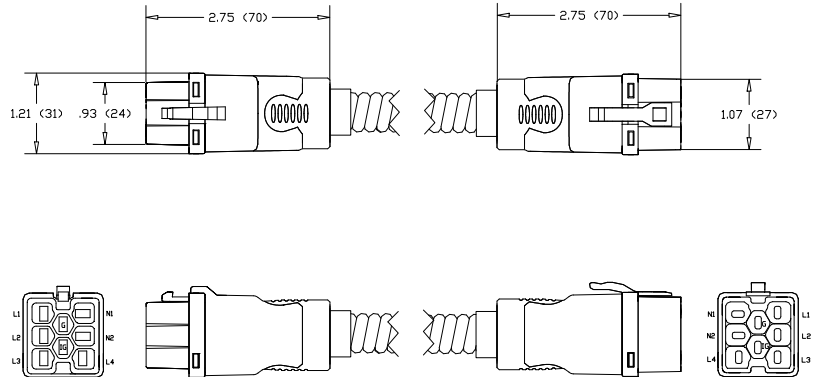

Notes

1. Dimensions are in inches (millimetres).
2. 125/250V 20A (4L, 2N, 2G) keyed-orientation is shown.
3. 480 and 600V product cCSA certified only "not for interrupting current".
4. Other system ratings and applications are available in uniquely-keyed and colour-coded configurations.

Ordering Information

Catalogue No. **T H – VC – LNGO – E III A UU**

T Standard **1** = UL/CSA (MC/AC-90 Cable), **2** = CSA (AC-90 Cable)

VC System **22** = 125/250V 20A, **42** = 277/480V 20A, **62** = 347/600V 20A

| LNGO Application | Power Distribution | Switch | DALI Lighting Controls |
|-------------------------|---------------------------------|--------------------------------------|--|
| 8w | <u>4220</u> = (4L 2N 2G) | | |
| 8w | <u>3320</u> = (3L 3N 2G) | | |
| 7w | <u>4210</u> = (4L 2N G) | | <u>3112</u> = 3Ph 4w w/ DALI (3L N G 2D) |
| 6w | <u>2220</u> = (2L 2N 2G) | | |
| 5w | <u>2210</u> = (2L 2N G) | | |
| 5w | <u>3110</u> = (3L N G) | | <u>1112</u> = Single Cct w/ DALI (L N G 2D) |
| 4w | <u>2110</u> = (2L N G) | <u>1012</u> = 3, 4-Way Switch | |
| 3w | <u>1110</u> = (L N G) | <u>1011</u> = Switch | |

III Length in dm **040** = 4.0m

A Cable Type **A** = Standard Armoured Cable
H = Halogen Free Armoured Cable

UU Wire Upsize **blank** = none, **10** = Upsized Neutrals only, **11** = Upsize all conductors

