

Receptacle

Provides power supply connection and interface between hardwiring and EZ-Wiring


Flush mount device for use in enclosures and junction boxes includes leads prepared for field connection.

Specifications

- Connectors are integrally moulded for superior strength and reliability.
- Mating connectors are self-latching and shrouded for added safety and protection.
- Uniquely-keyed, colour-coded mating connectors ensure safe, simple and error-free connectivity.
- Robust terminals deliver excellent electrical performance.
- Manufactured with Eco-Friendly Halogen-free RoHS-compliant materials.
- UL 183 and CSA 22.2 No 203.1 certified Manufactured Wiring System
- Approved for luminaire disconnect per NEC 410.73(g) and CEC Part 1 30-308(4)
- Acceptable for use in environmental air handling spaces per NEC 300-22(c) and CEC Part 1 12-010(3)
- Constructed with 8" leads prepared for connection.

Notes

1. Dimensions are in inches (millimetres).
2. 125/250V 20A (4L, 2N, 2G) keyed-orientation is shown.
3. 480 and 600V product cCSA certified only "not for interrupting current".
4. Other system ratings and applications are available in uniquely-keyed and colour-coded configurations.

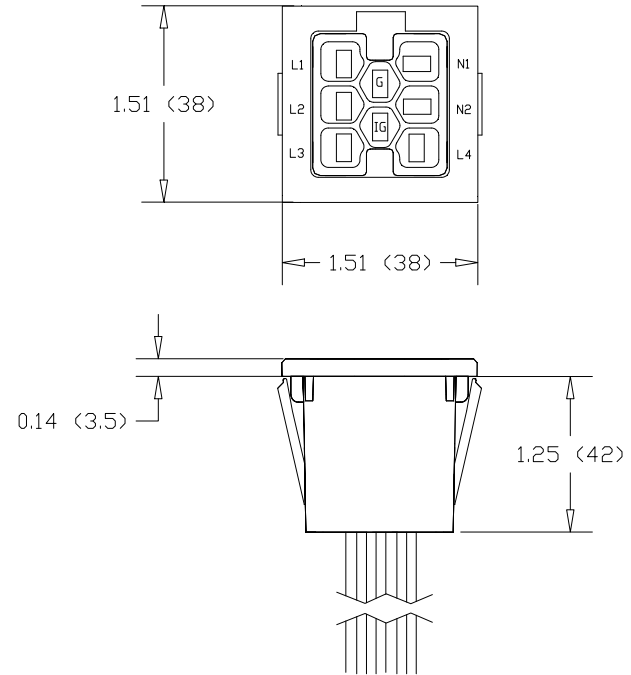

Ordering Information

Catalogue No. **TH - VC - LNGO - R UU**

T Standard **1** = UL/CSA (MC/AC-90), **2** = CSA (AC-90)

VC System **22** = 125/250V 20A, **42** = 277V 20A, **62** = 347V 20A

LNGO Application	Power Distribution	Switch	DALI Lighting Controls
8w	4220 = (4L 2N 2G)		
8w	3320 = (3L 3N 2G)		
7w	4210 = (4L 2N G)		3112 = 3Ph 4w w/ DALI (3L N G 2D)
6w	2220 = (2L 2N 2G)		
5w	2210 = (2L 2N G)		
5w	3110 = (3L N G)		1112 = Single Cct w/ DALI (L N G 2D)
4w	2110 = (2L N G)	1012 = 3, 4-Way Switch	
3w	1110 = (L N G)	1011 = Switch	

UU Wire Upsize **blank** = none, **10** = Upsized Neutrals only, **11** = Upsize all conductors

