

## Receptacle

**Provides power supply connection and interface between hardwiring and EZ-Wiring**


Flush mount device for use in enclosures and junction boxes includes leads prepared for field connection.

### Specifications

- Connectors are integrally moulded for superior strength and reliability.
- Mating connectors are self-latching and shrouded for added safety and protection.
- Uniquely-keyed, colour-coded mating connectors ensure safe, simple and error-free connectivity.
- Robust terminals deliver excellent electrical performance.
- Manufactured with Eco-Friendly Halogen-free RoHS-compliant materials.
- CSA 22.2 No 203.1 certified Manufactured Wiring System
- Approved for luminaire disconnect per CEC Part 1 30-308(4)
- Acceptable for use in environmental air handling spaces in accordance with CEC Part 1 12-010(3).
- Constructed with 8" leads prepared for connection.

LSZH  
Halogen Free

RoHS  
Compliant

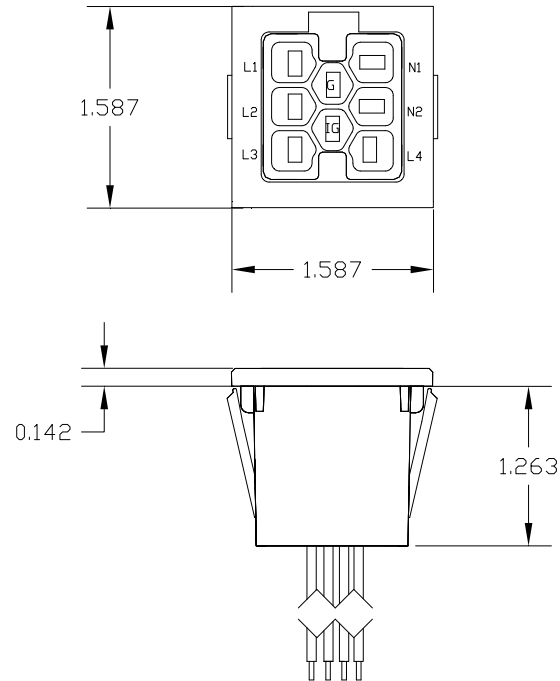

### Ordering Information

Catalogue No. **T H – VC – LNGO – R UU**

**T** Standard **1** = UL/CSA (MC/AC-90), **2** = CSA (AC-90)

**VC** System **22** = 125/250V 20A, **42** = 277V 20A, **62** = 347V 20A  
**23** = 125/250V 30A, **43** = 277V 30A, **63** = 347V 30A

<b>LNGO</b> Application	<b>Power Distribution</b>	<b>Switch</b>	<b>DALI Lighting Controls</b>
8w	<b><u>4220</u></b> = (4L 2N IG G)		
8w	<b><u>3320</u></b> = (3L 3N IG G)		
7w	<b><u>4210</u></b> = (4L 2N G)		<b><u>3112</u></b> = 3Ph 4w w/ DALI (3L N G 2D)
6w	<b><u>2220</u></b> = (2L 2N IG G)		
5w	<b><u>2210</u></b> = (2L 2N G)		
5w	<b><u>3110</u></b> = (3L N G)		<b><u>1112</u></b> = Single Cct w/ DALI (L N G 2D)
4w	<b><u>2110</u></b> = (2L N G)	<b><u>1012</u></b> = 3, 4-Way Switch	
3w	<b><u>1110</u></b> = (L N G)	<b><u>1011</u></b> = Switch	

**UU** Wire Upsize **blank** = none, **10** = Upsized Neutrals only, **11** = Upsize all conductors