


ULTRALX[®] Dual-Listed AC90/MC Armoured Cable

Meets or exceeds the following requirements:

- CSA 22.2 No. 51-95 (AC90) for use in Canada
- UL 1569 (Type MC) for use in US

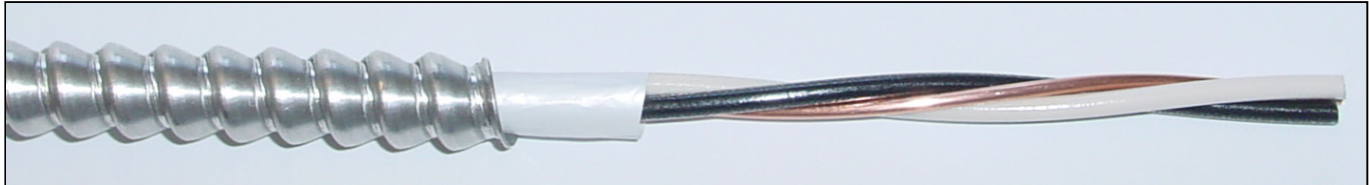

Applications

For use in service, feeder and branch circuits in commercial, industrial, multi-residential buildings and places of assembly. For exposed and concealed wiring in dry locations (90°C).

Intended for installation in accordance with the Canadian Electrical Code Part 1 or National Electrical Code (NEC) Article 330, or other applicable parts of the NEC; where appropriate.

Specification

600V Insulated Solid Copper Conductors (Stranded available upon request)

Polyester Tape

Aluminum Interlocking Armour

Limited Smoke Rating (ST1)

Lightweight Construction

Special Considerations

Multiple Grounding Conductors; Oversized Neutral Conductors; Multi-Conductors (Multi-circuit)

Special requests can be made online at support@electeconline.com or by phone (613) 836-0300

ULTRALX AC90/MC Cable	Product	Cat No.	Circuit	Neutral	Ground	Nominal OD	Weight (lbs/1000')
Standard Product (150m reels)	14/2	AC90/MC-14/2	1 - #14 blk	1 - #14 wht	1 - #14 bare	.45"	93
	14/3	AC90/MC-14/3	2 - #14 blk, red	1 - #14 wht	1 - #14 bare	.47"	113
	14/4	AC90/MC-14/4	3 - #14 blk, red, blu	1 - #14 wht	1 - #14 bare	.49"	132
	12/2	AC90/MC-12/2	1 - #12 blk	1 - #12 wht	1 - #12 bare	.47"	122
	12/3	AC90/MC-12/3	2 - #12 blk, red	1 - #12 wht	1 - #12 bare	.49"	150
	12/4	AC90/MC-12/4	3 - #12 blk, red, blu	1 - #12 wht	1 - #12 bare	.53"	179
	10/2	AC90/MC-10/2	1 - #10 blk	1 - #10 wht	1 - #10 bare	.53"	172
	10/3	AC90/MC-10/3	2 - #10 blk, red	1 - #10 wht	1 - #10 bare	.57"	214
	10/4	AC90/MC-10/4	3 - #10 blk, red, blu	1 - #10 wht	1 - #10 bare	.65"	281
	14/2 IG	AC90/MC-14/2+IG	1 - #14 blk	1 - #14 wht	2 - #14 bare, green	.47"	113
	12/2 IG	AC90/MC-12/2+IG	1 - #12 blk	1 - #12 wht	2 - #12 bare, green	.49"	150
10/2 IG	AC90/MC-10/2+IG	1 - #10 blk	1 - #10 wht	2 - #10 bare, green	.57"	214	
Specialty Product	12/8 IG	AC90/MC-12/8+IG	6 - #12 blk, red, blu, blk/yl, red/yl, blu/yl	2 - #12 wht, wht/yl	2 - #12 bare, green	.74"	320
	10/8 IG	AC90/MC-10/8+IG	6 - #10 blk, red, blu, blk/yl, red/yl, blu/yl	2 - #10 wht, wht/yl	2 - #10 bare, green	.85"	480

OTHER CONSTRUCTIONS ARE AVAILABLE BY CONTACTING ELECTEC