Prewired Round Raised-Floor Box Assemblies

Provides quick, simple, safe, cost-effective installation of a wide variety of configurations.
Seamless interface with **EZ-Wiring®** system.

Features and Benefits:

- Assemblies are prewired for quick, simple, safe, cost-effective installation.
- Fits a standard 6" round core.
- Cast aluminum cover plate.
- Attractive, durable design.
- Available in several finishes.
- Each lid opens separately (full 180º - flush to floor).
- Water-tight cover meets or exceeds UL scrub water exclusion requirements.
- Standard openings accommodate a wide variety of devices and configurations.
- Removable barrier separates Power and Data/Comm.
- Adjustable mounting to accommodate various floor thicknesses.
- An economical solution for virtually every application.
- Interfaces with **EZ-Wiring®** products.



"_ _ IRKKXX"



"_ _ DDDKXX"



"_ _ DDXKXX"



"_ _ XFXXXX"

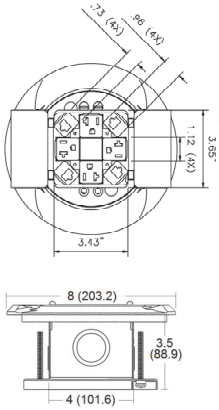

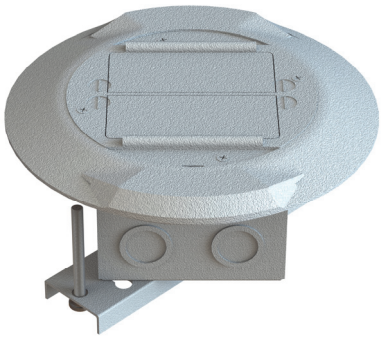



Carpet Trim



Tile Trim

Ordering Information

Catalogue No.; 1F – *VC – LNGO – xyz T F D G S XX C ll*

1F	_ _	_ _ _ _ _	0 _ _	_	_	_	_	_	_ _	_	_ _

VC	System	**11** = 125V 15A, **12** = 125V 20A, **21** = 125/250V 15A, **22** = 125/250V 20A, **LL** = Low Voltage
LNGO	Application	***Power Distribution***
	3w	**1110** = (L,N,G),
	4w	**2110** = (2L,N,G), **1120** = (L,N,G,IG)
	5w	**2210** = (2L,2N,G), **3110** = (3L,N,G)
	6w	**3120** = (3L,N,G,IG), **2220** = (2L,2N,G,IG)
	7w	**3310** = (3L,3N,G), **4210** = (4L,2N,G)
	8w	**3320** = (3L,3N,G,IG), **4220** = (4L,2N,G,IG)
xyz	Box selection	**x** = Length in inches (**0** = round), **y** = Width in inches, **z** = Height in inches
T	Trim	**C** = Carpet, **T** = Tile
F	Finish	**A** = Bushed Aluminum, **B** = Brass, **G** = Gray, **I** = Ivory, **K** = Black, **N** = Brown
D	Device Manufacturer	**B** = Bryant, **C** = Cooper, **H** = Hubbell, **I** = Insteon, **L** = Leviton, **P** = P&S, **X** = no device
G	Device Grade	**C** = Commercial, **H** = Hospital, **I** = Industrial, **R** = Residential, **S** = Specification, **X** = n/a
S	Device Style	**D** = Decorator, **I** = 1" Square receptacle, **X** = not applicable
XX	Device Type	**D** = Duplex, **F** = Furniture connection, **G** = GFI, **K** = Keystone openings (4), **P** = Surge protected, **R** = Single receptacles (4), **X** = no device
C	Device Colour	**A** = Almond, **G** = Gray, **I** = Ivory, **K** = Black, **N** = Brown, **O** = Orange, **R** = Red, **U** = Blue, **W** = White
ll	Cable Length in meters	***or*** **D** = 0.5m Drop Cable, **F** = Tap, **U** = Ultralx Flex (7m), **X** = not applicable

Adhere to all Code requirements and carefully follow installation instructions

C SA US (LR91749)

LSZH Halogen Free

RoHS Compliant

ELECTEC Building Wiring Systems
90 Decosta Street, Arnprior, ON K7S 0B5
Phone: 613-622-0840 Fax: 613-622-0334
www.electeconline.com