


# Control Drop

**Provides connection to control devices/sensors.**

Compact device with integrated cord for quick connection of sensors and other control devices.

## Features and Benefits:

- **ELECTEC EZ-Wiring®** components are UL Listed to be in compliance with UL 183 – Manufactured Wiring Systems (QQVX) and CSA Certified to be in compliance with CSA 22.2 No. 203-1 - Manufactured Wiring Systems.
- Robust terminal design exceeds 470Amp for 4 seconds.
- **EZ-Wiring®** connectors are integrally moulded (fully encapsulated) utilizing high impact Halogen-free, Eco-Friendly, Low Smoke, UL94-V0 rated, Oxygen Index – 33%, RoHS-compliant polymers for superior strength, reliability and safety.
- Dielectric Withstand 3000Vac.
- Mating connectors are self-latching and shrouded for added protection.
- Uniquely-keyed and colour-coded to clearly indicate ratings and provide safe, simple, error-free connectivity. Only connectors having identical colours can plug together properly.
- Approved “Ballast Disconnect Means” per NEC 410.73(g) and CEC Part 1 30-308(4).
- Suitable for use in environmental air handling spaces (plenums) per NEC 300-22(c) and CEC Part 1 12-010(3)
- Acceptable for interrupting current (make or break) under full load.

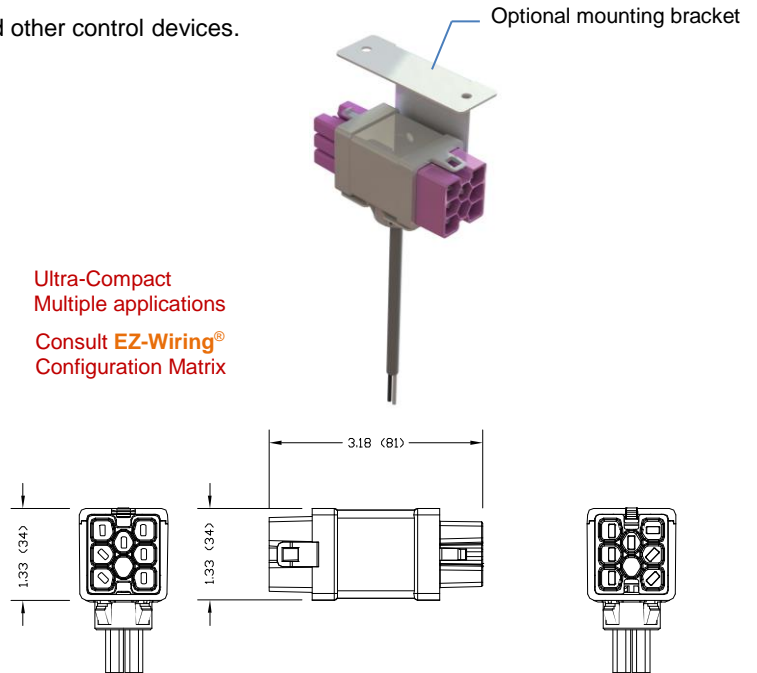

## Ordering Information

Catalogue No.;

1H – VC – LNGO – G III T W ttt XYZ

1H	__	__	__	G	X	X	X	X	__	__	__	__
----	----	----	----	---	---	---	---	---	----	----	----	----

VC System **2D** = 125/250V 20A + Control,  
**4D** = 277/480V 20A + Control,  
**6D** = 347/600V 20A + Control

LNGO Application **DALI/Class 1 (Control Wiring)**

5w **1112** = 1 circuit + control (L,N,G,2C)

III Cable Length in dm. **XXX** = not applicable

T Cable Type **X** = not applicable

W (W) Cord Gauge **4** = #14AWG, **6** = #16AWG, **8** = #18AWG

ttt (ttt) Cord Length **030** = 30cm (12in), **045** = 45cm (18in), **060** = 60cm (24in), **075** = 75cm (30in), **090** = 90cm (36in)  
**125** = 1.25m (4ft), **180** = 1.8m (6ft), **250** = 2.5m (8ft), **300** = 3m (10ft), **350** = 3.5m (11.5ft)

XYZ (X) Cord Type **C** = CMP (FT6)  
(Y) Cord Colour **G** = Gray  
(Z) Other Options **A** = Quick-connector style “A”, **M** = Quick-connector style “M”,  
**W** = Wire connector, **blank** = none

*Adhere to all Code requirements and carefully follow installation instructions*

