




Controls Tap

Provides connection to control devices such as occupancy sensors

Compact low-profile device for quick connection to controls devices. Snap-in 1/2" trade ko design can be field or factory installed.

Specifications

- Connectors are integrally moulded for superior strength and reliability.
- Mating connectors are self-latching and shrouded for added safety and protection.
- Uniquely-keyed, colour-coded mating connectors ensure safe, simple and error-free connectivity.
- Robust terminals deliver excellent electrical performance.
- Manufactured with Eco-Friendly Halogen-free RoHS-compliant materials.
- UL 183 and CSA 22.2 No 203.1 certified Manufactured Wiring System
- Approved for luminaire disconnect per NEC 410.73(g) and CEC Part 1 30-308(4)
- Acceptable for use in environmental air handling spaces per NEC 300-22(c) and CEC Part 1 12-010(3)
- Suitable for interrupting current up to 347V
- Constructed with 8" 18AWG control leads

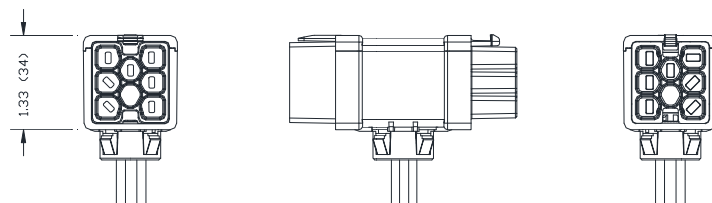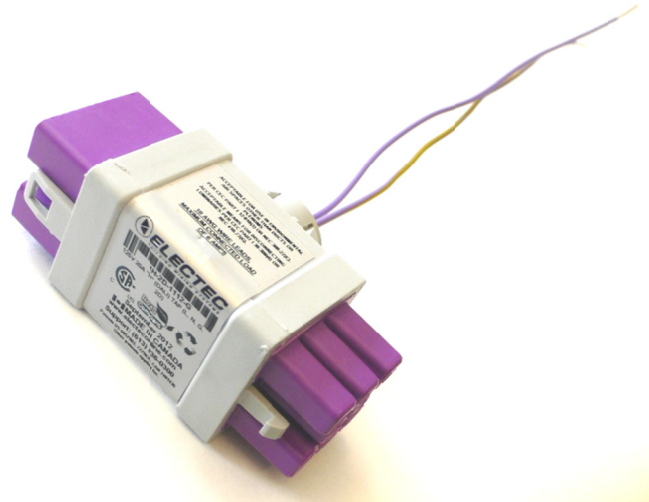

Control Tap Bussing Detail



Ordering Information

Catalogue No. 1H – **VC** – **LNGO** – G

VC System **2D** = 125/250V 20A + Control, **4D** = 277/480V 20A+ Control, **6D** = 347/600V 20A + Control

LNGO Application **1112** = Single Cct w/ Class 1 Control Wiring/DALI (L, N, G, D+, D-)
3112 = 3Ph 4w w/ Class 1 Control Wiring/DALI (L1, L2, L3, N, G, D+, D-)

