


Fixture Drop

Provides connection to suspended luminaires.

Compact device with integrated cord for quick connection of fixtures.

Features and Benefits:

- **ELECTEC EZ-Wiring**[®] components are UL Listed to be in compliance with UL 183 – Manufactured Wiring Systems (QQVX) and CSA Certified to be in compliance with CSA 22.2 No. 203-1 - Manufactured Wiring Systems.
- Robust terminal design exceeds 470Amp for 4 seconds.
- EZ-Wiring Connectors are integrally moulded (fully encapsulated) utilizing high impact Halogen-free, Eco-Friendly, Low Smoke, UL94-V0 rated, Oxygen Index - 33 %, RoHS-compliant polymers for superior strength, reliability and safety. Dielectric Withstand 3000Vac.
- Mating connectors are self-latching and shrouded for added protection.
- Uniquely-keyed and colour-coded to clearly indicate ratings and provide safe, simple, error-free connectivity. Only connectors having identical colours can plug together properly.
- Approved "Ballast Disconnect Means" per NEC 410.73(g) and CEC Part 1 30-308(4).
- Suitable for use in environmental air handling spaces (plenums) per NEC 300-22(c) and CEC Part 1 12-010(3)
- Acceptable for interrupting current (make or break) under full load.

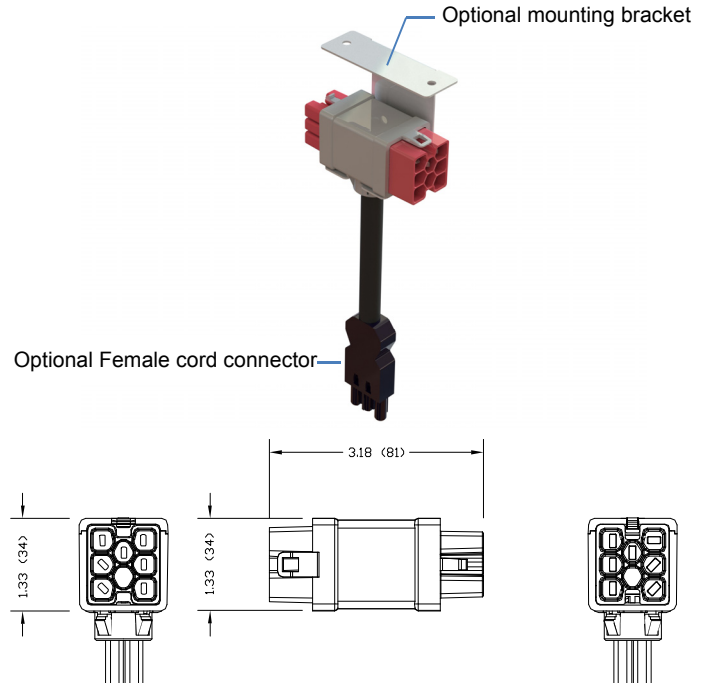

Ordering Information

Catalogue No.; 1H – VC – LNGO – G /// T Wtt XYZ

1H	__	__	__	G	X	X	X	X	__	__	__
----	----	----	----	---	---	---	---	---	----	----	----

VC System 22 = 125/250V 20A, 2D = 125/250V 20A + Control,
42 = 277/480V 20A, 4D = 277/480V 20A + Control,
62 = 347/600V 20A, 6D = 347/600V 20A + Control

LNGO Application **Power Distribution** **DALI/Class 1 (Control Wiring)**
 3w 1110 = (L,N,G)
 4w 2110 = (2L,N,G)
 5w 1112 = 1 circuit + control (L,N,G,2C)

/// Cable Length in dm. XXX = not applicable

T Cable Type X = not applicable

Wtt (W) Cord Gauge 4 = #14AWG, 6 = #16AWG, 8 = #18AWG
 (tt) Cord Length 30 = 30cm (12in), 45 = 45cm (18in), 50 = 50cm (20in), 60 = 60cm (24in), 70 = 70cm (28in),
80 = 80cm (32in), 90 = 90cm (36in)

XYZ (X) Cord Type J = SJOW (300V), O = STOW (600V)
 (Y) Cord Colour K = Black, W = White
 (Z) Other Options C = Female cord connector, A = Quick-connector style "A", M = Quick-connector style "M",
W = Wire connector, blank = none

Adhere to all Code requirements and carefully follow installation instructions

