


Fixture Tap

Provides interconnection of light fixtures as well as floor boxes.


Compact low-profile device for quick connection of luminaires. Snap-in 1/2" Trade size knockout design can be field or factory installed.

Features and Benefits:

- **ELECTEC EZ-Wiring®** components are UL Listed to be in compliance with UL 183 – Manufactured Wiring Systems (QQVX) and CSA Certified to be in compliance with CSA 22.2 No. 203-1 - Manufactured Wiring Systems.
- Robust terminal design exceeds 470Amp for 4 seconds.
- **EZ-Wiring®** connectors are integrally moulded (fully encapsulated) utilizing high impact Halogen-free, Eco-Friendly, Low Smoke, UL94-V0 rated, Oxygen Index – 33%, RoHS-compliant polymers for superior strength, reliability and safety.
- Dielectric Withstand 3000Vac.
- Mating connectors are self-latching and shrouded for added protection.
- Uniquely-keyed and colour-coded to clearly indicate ratings and provide safe, simple, error-free connectivity. Only connectors having identical colours can plug together properly.
- Approved "Ballast Disconnect Means" per NEC 410.73(g) and CEC Part 1 30-308(4).
- Suitable for use in environmental air handling spaces (plenums) per NEC 300-22(c) and CEC Part 1 12-010(3)
- Acceptable for interrupting current (make or break) under full load.



Ultra-Compact
Multiple applications
Consult **EZ-Wiring®**
Configuration Matrix

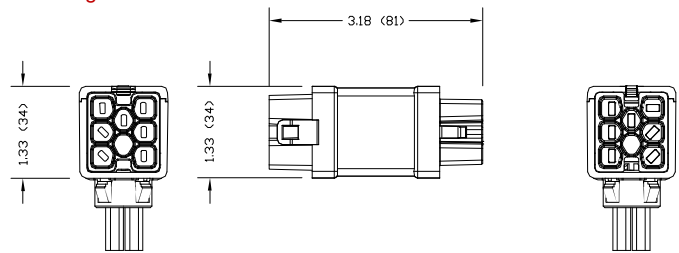

Ordering Information

Catalogue No.;

1H – VC – LNGO – F III T W ttt XYZ



VC System **22** = 125/250V 20A, **2D** = 125/250V 20A + Control,
42 = 277/480V 20A, **4D** = 277/480V 20A + Control,
62 = 347/600V 20A, **6D** = 347/600V 20A + Control

LNGO Application **Power Distribution** **DALI/Class 1 (Control Wiring)**
3w **1110** = (L,N,G)
4w **2110** = (2L,N,G)
5w **1112** = 1 circuit + control (L,N,G,2C)

III Cable Length in dm. **XXX** = not applicable

T Cable Type **X** = not applicable

W (W) Wire Gauge **8** = #18AWG

ttt (ttt) Tail Length **015** = 15cm (6in), **020** = 20cm (8in), **025** = 25cm (10in), **030** = 30cm (12in)

XYZ (X) Wire Type **F** = TFN
(Y) Cord Colour **X** = not applicable, **blank** = none
(Z) Other Options **W** = Wire Connector, **blank** = none

Adhere to all Code requirements and carefully follow installation instructions

