


ULTRALX® AC90 Armoured *Home Run* Cables

Meets or exceeds the following requirements:

CSA 22.2 No. 203.1 (Manufactured Wiring Systems)



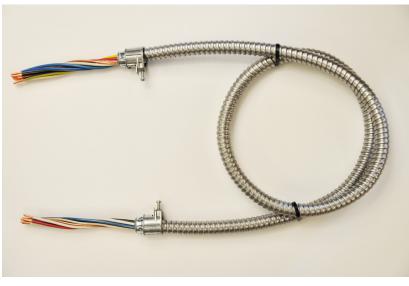

Features

Multi-conductor runs from panel to junction box for lighting, power, control circuits.

Pre-wired home-run cable arrives on site ready to install. Save time and money.

Applications

Repetitive home-runs in commercial, industrial, multi-residential buildings and places of assembly.

For exposed and concealed wiring in dry locations (90°C). Suitable for cable trays and environmental air-handling spaces.

Installation in accordance with the Canadian Electrical Code Part 1.

Specification

Constructed with ULTRALX AC90 Armoured Cable (Meeting CSA Standard 22.2 No. 51-95) 600V Insulated Solid Copper Conductors (Stranded available upon request) Polyester Tape Aluminum Interlocking Armour Compact and Lightweight Construction

Packaging Options

Cut-to-length whip assemblies c/w 8" tails for box connection and 60" tails for panel connection Cut-to-length whip assemblies c/w 8" tails for box connection and 8" tails for box connection

| ULTRALX | Product | Cat No. | Circuit | Neutral | Ground | Nominal OD | Weight (lbs/1000') |
|--|---------|---------------|--|------------------------|----------------------------|---------------|-----------------------|
| AC90 Cable Whip Assemblies (c/w 8" & 60" tails) | 12/4 | A/USAC124SO | 3 - #12 blk, red, blu | 1 - #12 wht | 1 - #14 bare | .49" | 152 |
| | 10/4 | A/USAC104SO | 3 - #10 blk, red, blu | 1 - #10 wht | 1 - #12 bare | .56" | 215 |
| | 12/8 IG | A/USAC128IGSO | 6 - #12 blk, red, blu, blk/yl, red/yl, blu/yl | 2 - #12 wht, wht/yl | 2 - #14 bare, #12 green | .66" | 288 |
| | 10/8 IG | A/USAC108IGSO | 6 - #10 blk, red, blu, blk/yl, red/yl, blu/yl | 2 - #10 wht, wht/yl | 2 - #12 bare, #10 green | .76" | 432 |
| AC90 Cable Whip Assemblies (c/w 8" & 8" tails) | 12/4 | A/UTAC124SO | 3 - #12 blk, red, blu | 1 - #12 wht | 1 - #14 bare | .49" | 152 |
| | 10/4 | A/UTAC104SO | 3 - #10 blk, red, blu | 1 - #10 wht | 1 - #12 bare | .56" | 215 |
| | 12/8 IG | A/UTAC128IGSO | 6 - #12 blk, red, blu, blk/yl, red/yl, blu/yl | 2 - #12 wht, wht/yl | 2 - #14 bare, #12 green | .66" | 288 |
| | 10/8 IG | A/UTAC108IGSO | 6 - #10 blk, red, blu, blk/yl, red/yl, blu/yl | 2 - #10 wht, wht/yl | 2 - #12 bare, #10 green | .76" | 432 |

OTHER CONSTRUCTIONS ARE AVAILABLE BY CONTACTING ELECTEC